

~~Network - old regulator in house~~


oil in rear ends 75-140 synthetic  
oil filter WIX 51005

if new spare regulator is installed - do not balance.

✓ Clockwise rotation on dist - shaft  
✓ Joint setting .020"

Valve setting .012 intake and exhaust.

✓ FIRING ORDER 1-4-2-6-3-5  
- Colorado Rail Annual #9

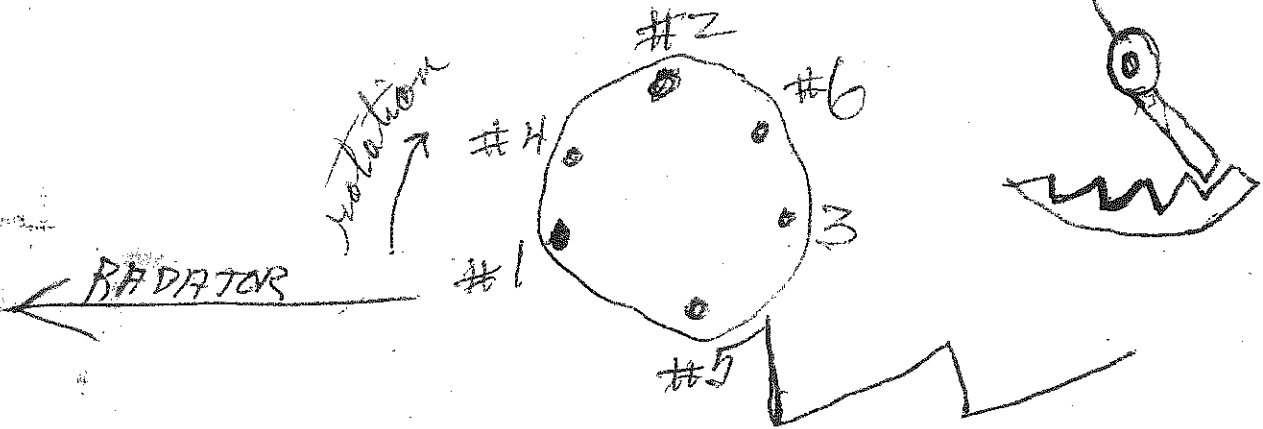

Oil level on dipstick midway between  
"full" & "add oil". (8 qt capacity + oil filter =  
9 qts. We put in only 8 qts, which gives the  
midway reading)